


Using **pit bull** Spooled Rear Stand:

- 1) Top Supports are separate or installed upside down for shipping - orient as shown before use. Taller leg of "V" shaped top supports should be toward front of bike.
- 2) Set width of "V" shaped top supports to catch spools, then tighten bolts. For best fit, top supports should catch just inside outer flange of each spool.
- 3) While standing on left side of bike, hold bike upright (vertical) by seat or tail section with left hand. Then bring stand into place with right hand.
- 4) Hook spools with stand and start to press down (you will feel the bike get stable). Then follow through to lift the bike.

Notes:

- Ensure spools are tightly secured - use threadlock compound.
- If you have questions about the use of this product, please contact us or an authorized Pit Bull dealer.

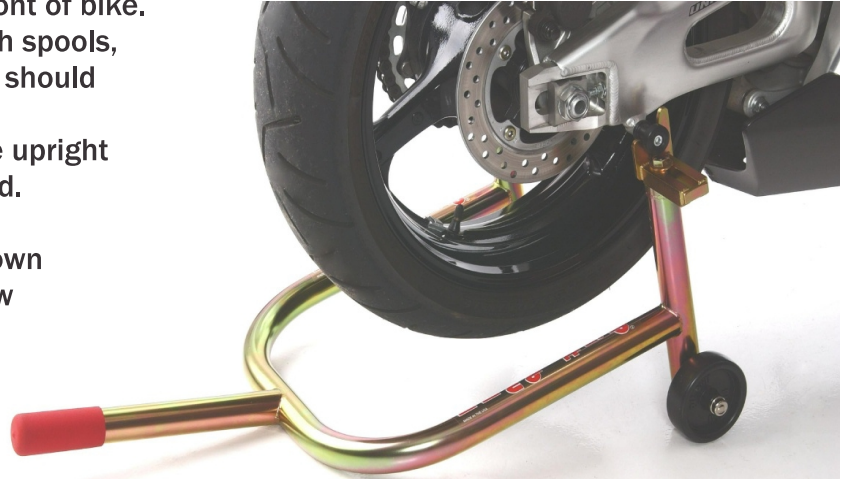

See reverse side for warnings:

Pit Bull Products, Inc.
614 Pearl Avenue
Huntsville, AL 35801



Phone: (256) 533-1977
Fax: (256) 533-3395
Website: www.pit-bull.com
E-mail: info@pit-bull.com

Warnings for using **pit bull** Spooled Rear Stand:

- Do not sit on the motorcycle while motorcycle is supported by the stand.
- Do not start the motorcycle while motorcycle is supported by the stand.
- Do not strap the motorcycle down while motorcycle is supported by the stand.
- Avoid prolonged exposure to salt(including salty air) and/or harsh chemicals as they might harmfully affect the stand's corrosion resistance.

