

Using the pit bull Forward Handle Rear

See reverse side for warnings:

The Pit Bull Forward Handle Rear Stand was released in 2003 as an alternative to traditional motorcycle rear stands. The stand is height adjustable and width adjustable and designed to be used from the left side of the motorcycle.

The Forward Handle Rear stand is available in both Spooled and non-Spooled(Standard) form, and either version can be converted to the other with the addition of just a couple pieces available separately.



Lifting Technique

To Use:


First set the width of the spooled or standard style top supports using the included thumb adjusters. Start on a smooth, level surface. Tilt bike to vertical and balance in position using your left hand on the handlebar of the bike. Using your right hand, bring stand into position as shown in the photo above. Hook the spools with the "V" shaped top supports or position rubber pads in a spot for lifting.

WARNING: Bikes with severe swingarm angles may require provisions to prevent slippage.

Push down on handle of stand to lift bike, allowing steel end plug to rest on the ground. If lower cross-bar contacts tire of motorcycle, adjust height of top supports using 6mm hex wrench. To lower bike, simply hold the left handlebar with your left hand and prepare to balance the bike, then lift the handle of the stand. If you have a side stand, you can use your foot to bring it down after the handle clears the side stand.



Standard (Rubber Pad)

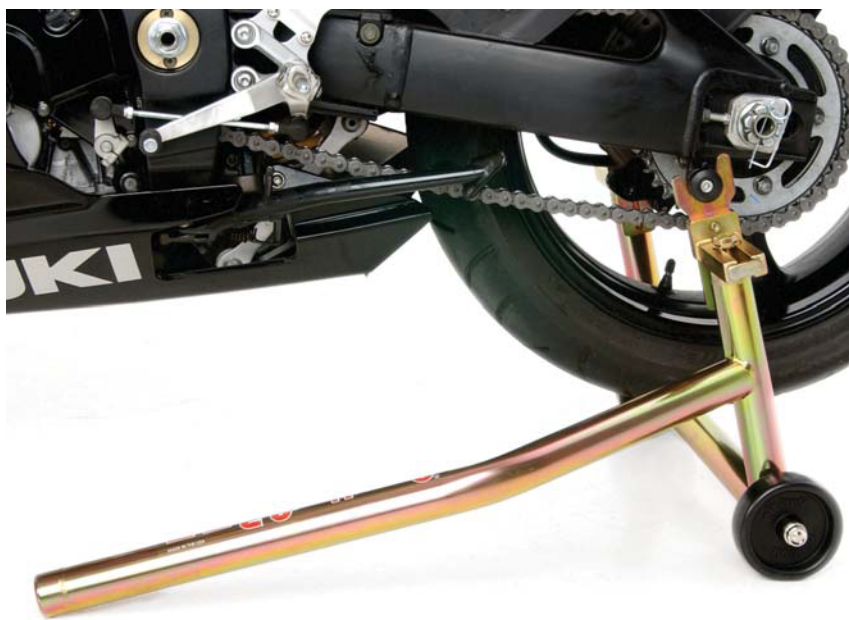

Spooled Style

Pit Bull Products, Inc.
614 Pearl Avenue
Huntsville, AL 35801



Toll Free: (877) 533-1977
Fax: (256) 533-3395
Website: www.pit-bull.com
E-mail: info@pit-bull.com

Warnings for using **pit bull** Forward Handle Rear Stands:

- Check all bolts for tightness before lifting the motorcycle every time you lift the motorcycle.
- Check stand for physical damage before use. Do not lift your motorcycle if the stand has sustained physical damage.
- Do not sit on the motorcycle while motorcycle is supported by the stand.
- Do not start the motorcycle while motorcycle is supported by the stand.
- Do not strap the motorcycle down while motorcycle is supported by the stand.
- Avoid prolonged exposure to salt(including salty air) and/or harsh chemicals as they might harmfully affect the stand's corrosion resistance.

